


Transport rack for flat glass AV 16.3

Double-sided rack with vertical compounded supporting elements.

Subrack	with pillarets
way of glass gripping	Attachment bars with clamping lock
Crane suspension	2 ring lugs
Lifting rims for forklift stacker	with spacing 750 mm
Recommended number of attach.bars according to the length of rack [pcs]	6 event.8

D - length [mm]	2000
Š - width [mm]	1000
NV - loading high [mm]	2000
V - total high [mm]	2280
NŠ - loading width [mm]	300
Load capacity [kg]	1500
Weigh of paint finishing [kg]	147

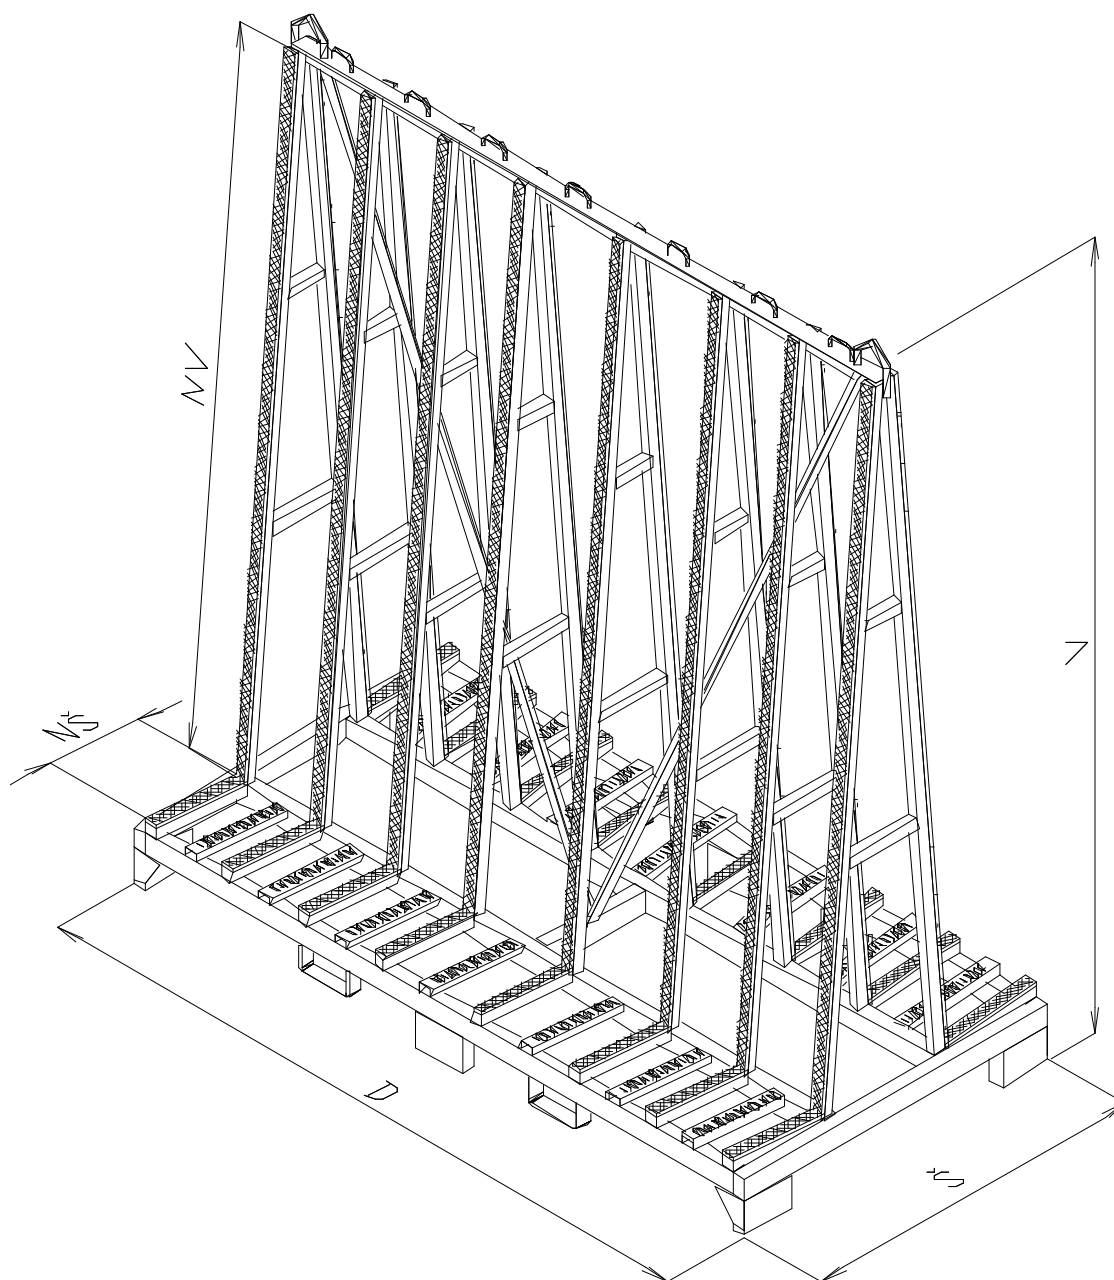

Ing.Milan Dohnal
Vývoz 5423
760 01 Zlín
Česká republika

Telefon: + 420 602566704
+ 420 603540331

e-mail: info@forset.cz