


Transport rack for flat glass AV 16.5

Double-sided rack with vertical compounded elements

Subrack	With pillarets
way of glass gripping	Attachment bars with clamping lock
Crane suspension	1 ring lug
Lifting rims for forklift stacker	With spacing 750mm
Recommended number of atch.bars due to length of rack [pcs]	6 event. 8

D - length [mm]	2000
Š - width [mm]	1000
NV - loading high [mm]	2000
V - total high [mm]	2300
NŠ - loading width [mm]	300
Load capacity [kg]	1500
Weigh of paint finishing [kg]	147

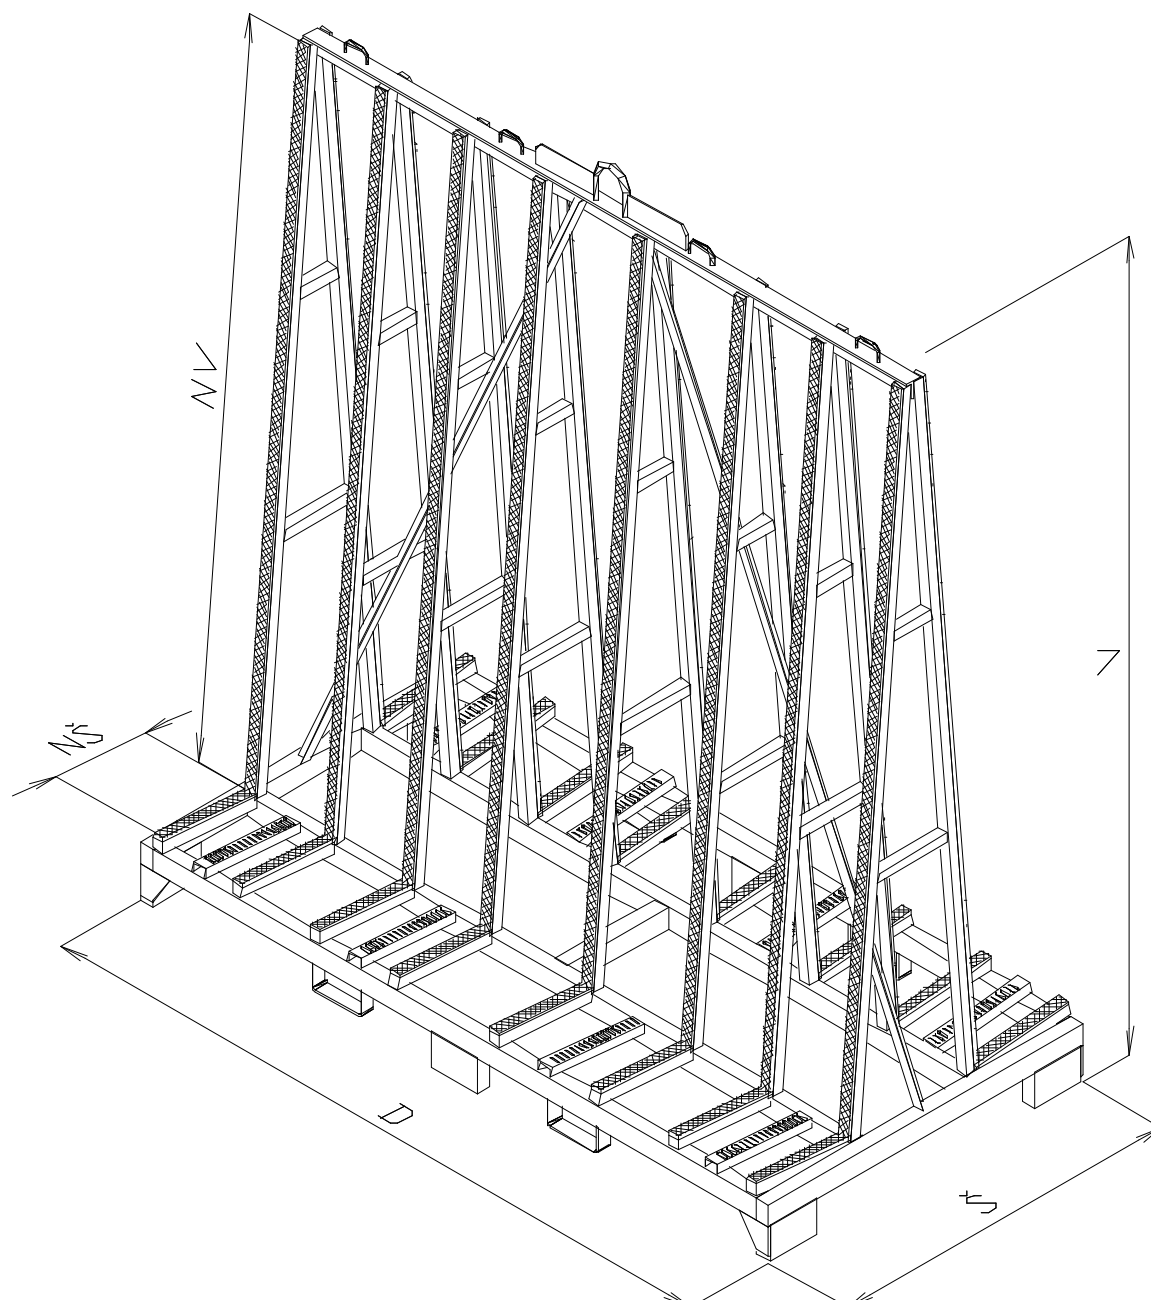

Ing.Milan Dohnal
 Vývoz 5423
 760 01 Zlín
 Česká republika

Telefon: + 420 602566704
 + 420 603540331

e-mail: info@forset.cz